

25DU Tandem Dual Gooseneck Dump


G.V.W.R.	25,900#	Axles	(2) 10,000# Dual Wheel Oil Bath Electric Brakes
G.A.W.R. (Ea. Axle)	10,000#	Supension	Heavy Duty 30,000# Adjustable
Coupler	30K 2-5/16" Adjustable Crank Type	Tire	ST235/80 R-16 Load Range E Dual
Safety Chains	3/8" Grd. 70 w/Safety Latch Hook (2 each)	Wheel	16" x 6"; Dual Wheel 8 Bolt
Jack	Dual 12,000# Side Wind Drop Legs	Floor	10 Gauge Smooth Steel
Neck	12" I-Beam	Lights	L.E.D. D.O.T. Stop, Tail, Turn & Clearance
Frame	12" x 16# I-Beam	Elec. Plug	7-Way RV
Crossmembers	8" Channel	Finish (Prep)	Steel is Cleaned to Ensure a Professional Smooth Finish.
Bed Crossmembers	3" Channel		
Bed Long Sils	8" Channel	Finish	Superior Quality Finish is Applied for a Highly Decorative and Protective Finish.
Bed Side Rails	5" x 3" Angle		

Standard Features

- Lockable Pump & Battery Box Mounted in Front of Bed
- J-Hooks for Tie Down
- Fully Formed Shroud for Tarp
- Self Contained Electric/Hydraulic Scissor Lift
- 45 Degree Dump Angle
- Double Rear Doors
- 48" Sides w/ Formed Channel Supports
- 10 Ga. Floor
- Stake Pockets (Sides)
- EZ Lube Hubs
- Dexter Brand Axles
- 110V Charger
- (4) 5/8" D-Rings Inside Bed
- Forward Self Adjusting Brakes
- Cambered Axles
- Spare Tire Mount
- Grommet Mount Sealed Lighting
- L.E.D. Lighting Package
- Protected Wiring
- Complete Break-A-Way System w/Charger
- Radial Tires
- Mudflaps
- Spare Tire & Wheel- Standard Equipped **NEW!**

Description

Dimensions				Weights & Capacities			
Length	A	B	C	Length	Empty Weight	Payload	Box Capacity
18'	216-1/2"	146"	70-1/2"	25DU-18	7,620#	18,280#	21.98 Cubic Yards
20'	240-1/2"	162"	78-1/2"	25DU-20	8,070#	17,830#	23.70 Cubic Yards

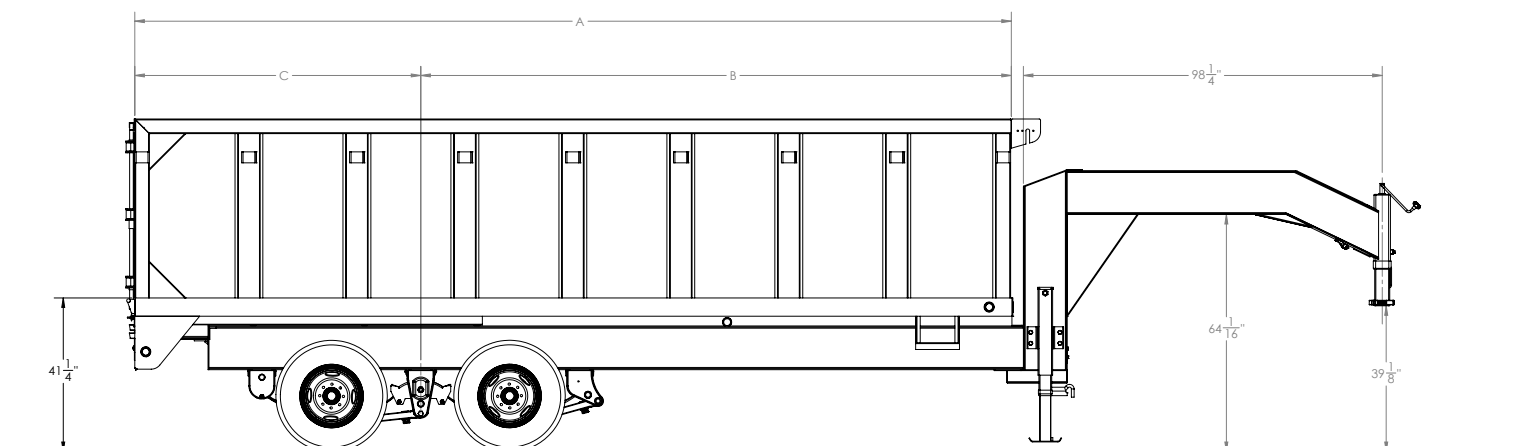

*Weights and cargo capacities shown are for base models without options and are estimates only

25DU Tandem Dual Gooseneck Dump ●



Model	Weight*	Description
25DU-18	7,620#	92" x 18' Tandem Dual Gooseneck Dump
25DU-20	8,070#	92" x 20' Tandem Dual Gooseneck Dump

*Weights shown are for base models without options and are estimates only

Optional Equipment

Category	Description
COUPLER	Pintle Hitch (Bumperpull) ILO Gooseneck (Single Jack)
JACKS	Dual 2-Speed Landing Gear
AXLES	12,000# Axle Upgrade (GVWR Remains 25,900#)
TIRE/WHEEL	Tire Upgrade (ST235/85 R-16 LR-G Dual)
TIRE/WHEEL	Spare Tire Upgrade (ST235/85 R-16 LR-G Dual)
TIRE/WHEEL	Tire Upgrade (ST215/80 R-17.5 LR-H Dual)
TIRE/WHEEL	Spare Tire Upgrade (ST215/80 R-17.5 LR-H Dual)
RAMPS	8' Slide In Ramps
POWER	Wireless Remote
POWER	5 Watt Solar Charger
BODY	Removable Deck on the Neck-Bolt On (8' W x 6' L)
CARGO CONTROL	Crank Style Roll Tarp
CARGO CONTROL	Industrial Roll Tarp w/Side Flaps - 18'
CARGO CONTROL	Industrial Roll Tarp w/Side Flaps - 20'